

**TENDER DOCUMENT:
CONSTRUCTION OF C&D DISPOSAL SITE EXPANSION
COLCHESTER BALEFILL FACILITY**

The Municipality of the County of Colchester (the “Municipality”) invites you to submit a bid to supply equipment, labour and materials for the construction of a disposal cell for Construction and Demolition (C&D) debris to be located at the Balefill Site at Kempton, Nova Scotia. The disposal cell is to be constructed as noted below:

1.0 TENDER SPECIFICATIONS

- (a) Size of the cell is to be one hundred seventy-seven meters (177m) in length by an average of fifty-seven meters (57m) in width. See attached design drawings for more detail.
- (b) Location of the cell is adjacent and adjoining to the current C&D disposal area.
- (c) A minimum of one meter of soil with a hydraulic conductivity of 1×10^{-5} cm/sec or better is to be placed between the lowest elevation of any of the waste and the highest elevation of the ground water or bedrock.
- (d) Suitable soil is available on the Balefill property from an existing location East of Landfill Cell 1 which is shown on the attached design drawings. However, the material may have to be screened to be made suitable to meet conductivity specifications.
- (e) Geotechnical testing is to be completed at the expense of the contractor once placement of material is finalized and must be carried out by an accredited firm that has been approved by the municipality.
- (f) Bids must include anticipated start and completion dates.
- (g) Bids must remain in effect for ninety (90) days.
- (h) It is strongly recommended that bidders visit the site to view the area prior to submitting a quotation.
- (i) All bids must be submitted on the form attached and all spaces must be completed.


2.0 RIGHT TO ACCEPT, REJECT OR CANCEL ANY TENDER

The Municipality reserves the right to:

- (a) at any time prior to the award of the Contract, to cancel this Tender and resubmit a proposed contract for tender.
- (b) at any time prior to the award of the Contract to extend the time for the submission of Bids; to modify these instructions, the tender notice, the form of tender, the specifications, the description of the work; or to change the terms of reference or contract documents.
- (c) eliminate any tenders received from companies that currently owe the Municipality of Colchester any funds and/or have outstanding legal matters with the Municipality of Colchester.
- (d) reject any bid that is unbalanced, unrealistic, or not truly reflective of current market levels.

A Tender submitted may be rejected and the Tender not considered if the Tender:

- (a) is not properly signed by the tenderer;
- (b) does not contain the bid price written in figures where indicated on the Tender Form;
- (c) does not acknowledge all Addenda issued to prospective tenderers;
- (d) contains a change in a bid price not initialed by the tenderer.

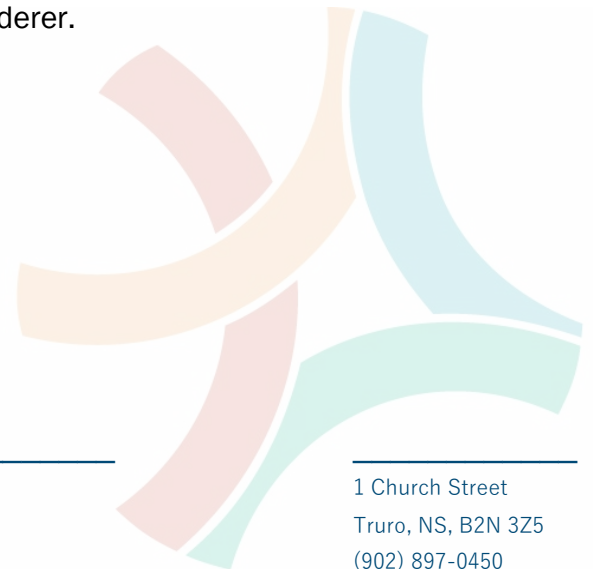

3.0 AWARD OF TENDER:

- (a) The Municipality shall notify the successful Tenderer by telephone and/or email that they are the successful Tenderer once it is approved by Municipal Council, at which time a Purchase Order will be issued.
- (b) The Municipality reserves the right, if the successful Bidder fails to comply with the Terms and Conditions as listed, to cancel this Contract and award it to another Supplier without penalty or action against the County.
- (c) The successful bidder will be provided with a hard copy set of full-size design drawings.

4.0 INVOICING:


- (a) Invoices shall be directed to:

Municipality of Colchester
Balefill Facility
Attn: Jessica Rushton
Manager of Balefill and Compost Operations
1 Church Street
Truro, N.S.
B2N 3Z5
Or emailed to: jrushton@colchester.ca

- (b) In addition to the H.S.T. Registration Number, Vendors are required to provide the amount of H.S.T. separately on all invoices.

5.0 PAYMENT TERMS:

- (a) Payment Terms will be considered as Net Thirty (30) Days from date of receiving test results verifying that all specifications of the tender are met.

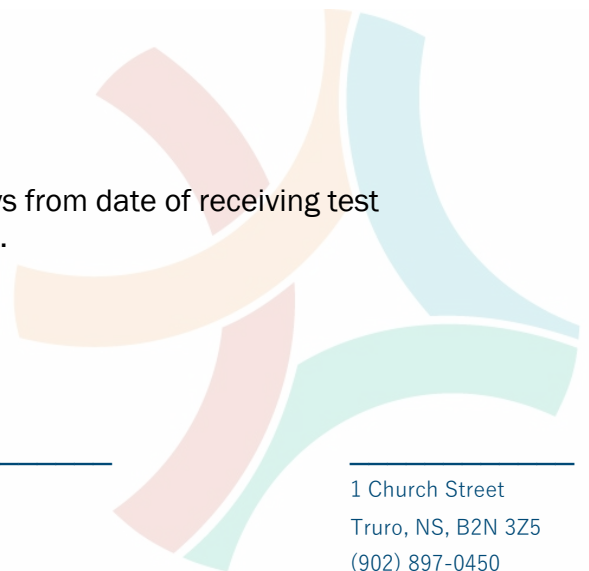

6.0 TENDER CLOSING

Sealed bid submissions will be received until **3:00 pm on Friday, June 19, 2020** at the office of the Manager of Balefill and Compost Operations, 188 Mingo Road, Kemptown, Nova Scotia, B6L 2K4. No bids will be accepted by e-mail or Fax. There will be no public opening of bid submissions. All sealed bids will be opened upon tender closing.

Sealed bid submissions that are being sent by courier can be addressed to the above address in Kemptown, however, bids that are to be mailed through Canada Post should be addressed to:

Jessica Rushton, Manager of Balefill and Compost Operations
Municipality of the County of Colchester
1 Church Street
Truro, Nova Scotia, B2N 3Z5

For more information or to set up an appointment to view the site please contact:

Jessica Rushton, Manager of Balefill and Compost Operations
Phone: (902) 897-0450 Ext. 201



BID SUBMISSION FORM

COMPANY NAME: _____

TOTAL COSTS FOR EXPANSION OF CONSTRUCTION AND DEMOLITIONS DISPOSAL SITE AS PER THE TERMS & CONDITIONS, & SPECIFICATIONS CONTAINED HEREIN:

<u>DESCRIPTION</u>	<u>PRICING</u>
(A) INVOICE PRICE FOR C&D CELL CONSTRUCTION	\$ _____
(B) INVOICE PRICE FOR GEOTECHNICAL TESTING	\$ _____
(C) HST @ 15%	\$ _____
TOTAL INVOICE PRICE FOR PROJECT (A+B+C)	\$ _____

INFORMATION TO ACCOMPANY TENDERS:

The Bidder hereby acknowledges the receipt of all Addendums and have attached them to this form?

Yes _____ No _____

Anticipated Time Frame for Project:

Project will commence within _____ calendar days from date of tender award

Project will be completed within _____ calendar days from the project start date



BID SUBMISSION FORM (CONTINUED)

COMPANY NAME: _____

MAILING ADDRESS: _____

CONTACT PERSON: _____

TELEPHONE: _____

E-MAIL: _____


I/WE CERTIFY THAT THIS SUBMISSION IS MADE IN ACCORDANCE WITH AND IN CONSIDERATION OF THE PROVISIONS CONTAINED HEREIN.

COMPANY NAME (Please Print)

AUTHORIZED SIGNATURE

TITLE (Please Print)

DATE

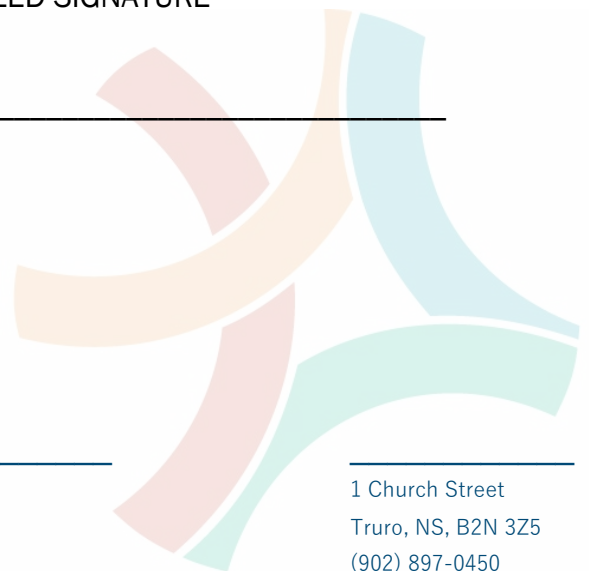

NORTHERN TIMBER NOVA SCOTIA CORPORATION
PID: 20400230

BOUNDARY PER PLAN SIGNED BY
KP MACDONALD (SEE NOTES)

30M MINIMUM
REQUIRED SETBACK

EXISTING SWALE TO
SETTLEMENT PONDS

EXISTING ACTIVE CAD CELL
(CONDITIONS REFLECTIVE
OF TIME OF SURVEY)

DIRECTION OF
ADVANCE

EXISTING SWALE TO
SETTLEMENT PONDS

EXISTING GRAVEL ACCESS ROAD




EXISTING OVERHEAD POWERLINES

EXISTING BAILEY CELL

EXISTING GRAVEL ACCESS ROAD (GATED ACCESS)

MUNICIPALITY OF THE COUNTY OF COLCHESTER
PID: 20286902
COLCHESTER BAILEY & COMPOSTING FACILITY
180 MINGO ROAD, KEMPTOWN, NS

NS DEPARTMENT
OF NATURAL RESOURCES
PID: 20419651

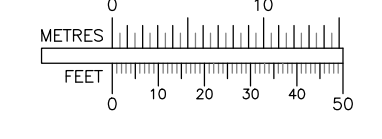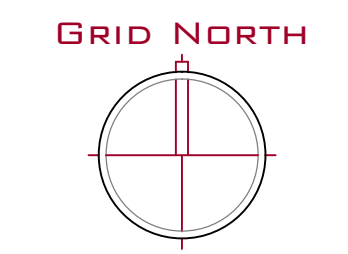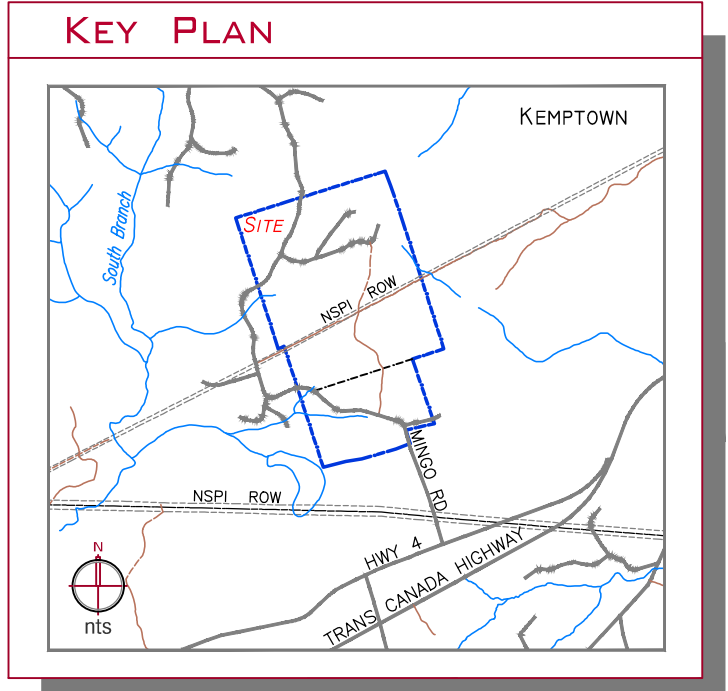

NOTES

DATA COLLECTED BY MEC-ES Ltd APRIL 16th & 17th 2020
ALL MEASUREMENTS ARE IN METRES UNLESS OTHERWISE NOTED.
ELEVATIONS REFER TO NOVA SCOTIA CONTROL MONUMENTS
(Nova Scotia, MIM Zone 5, AT577)
#223967 Easting : 5608908.648m Northing : 5053163.601m Elevation : 166.338m
#223966 Easting : 5608889.580m Northing : 5054980.417m Elevation : 164.165m
PROPERTY INFORMATION:
SERVICE NOVA SCOTIA AND MUNICIPAL RELATIONS - PROPERTY ONLINE
http://www.nspropertyonline.ca/ (APRIL 22nd 2020).
PROPERTY BOUNDARIES SHOWN ARE A GRAPHICAL REPRESENTATION ONLY.
See PLAN OF SURVEY SHOWING PARCEL "A", CROWN LAND, KEMPTOWN,
COLCHESTER COUNTY, NOVA SCOTIA. PREPARED FOR THE DEPARTMENT
OF LANDS AND FORESTRY, SURVEY'S DIVISION BY KENNETH P MACDONALD,
DATED 15th OF NOVEMBER 1988, AS FIELD PLOT P-121/88.
See ALSO GRANT OF EASEMENT DATED JANUARY 20th 2015 AND GRANT
OF EASEMENT AMENDING AGREEMENT DATED FEBRUARY 9th 2016 IN
FAVOR OF AFFINITY WIND GP, INC.

**PROVIDED FOR
INFORMATION ONLY**

REVISIONS:

REV: 1/1/20 BY: -



PROJECT:
EXISTING CONDITIONS SITEPLAN
Lands of
MUNICIPALITY OF THE COUNTY OF COLCHESTER
COLCHESTER BAILEY & COMPOSTING FACILITY
PID: 20286902
MINGO ROAD, KEMPTOWN, COLCHESTER COUNTY, NOVA SCOTIA


DRAWN BY:
C Lockhart

CHECKED BY:
RJ Bezanson

DATE:
6 May 2020

SCALE:
1 : 500

JOB No.
200306

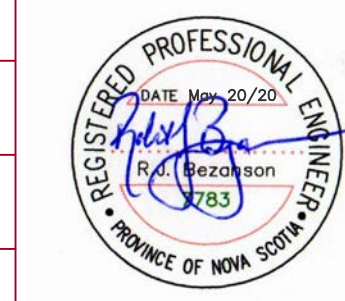

SHEET No.
200306-01




LEGEND: EXISTING CONDITIONS

	TRAFFIC SIGN
	CONCRETE BLOCK
	IRON PIN FOUND
	UTILITY POLE w/GUY
	SCALE
	BOUNDARIES
	EASEMENT
	GRAVEL EDGE
	DITCH CENTRELINE
	SWALE CENTRELINE
	TOP OF SLOPE
	TOE OF SLOPE
	POWERLINES
	EDGE OF TREES
	CONTOURS

NORTHERN TIMBER NOVA SCOTIA CORPORATION
PID: 20400230

BOUNDARY PER PLAN SIGNED BY
KP MACDONALD (SEE NOTES)

30M MINIMUM
REQUIRED SETBACK

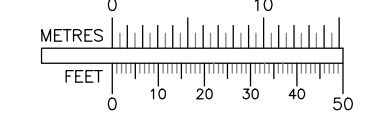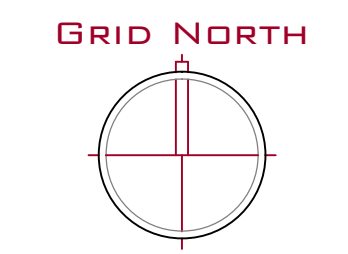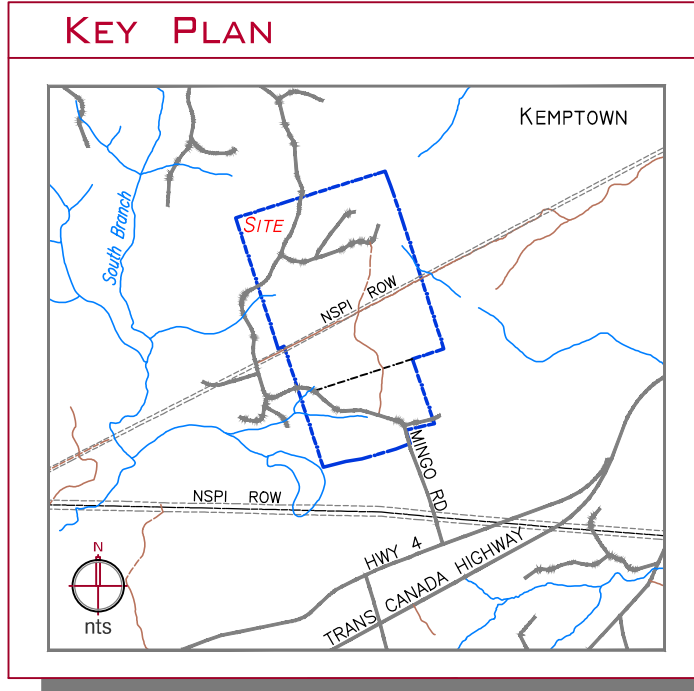

NOTES

DATA COLLECTED BY MEC-EGS Ltd APRIL 16th & 17th 2020
ALL MEASUREMENTS ARE IN METRES UNLESS OTHERWISE NOTED.
ELEVATIONS REFER TO NOVA SCOTIA CONTROL MONUMENTS
(Nova Scotia, MIM Zone 5, AT577)
#223967 Easting : 5608908.648m Northing : 5053163.601m Elevation : 166.338m
#223966 Easting : 5608889.580m Northing : 5054980.417m Elevation : 164.165m
PROPERTY INFORMATION:
SERVICE NOVA SCOTIA AND MUNICIPAL RELATIONS - PROPERTY ONLINE
http://www.nspropertyonline.ca/ (APRIL 22nd 2020).
PROPERTY BOUNDARIES SHOWN ARE A GRAPHICAL REPRESENTATION ONLY.
See PLAN OF SURVEY SHOWING PARCEL "A", CROWN LAND, KEMPTOWN,
COLCHESTER COUNTY, NOVA SCOTIA. PREPARED FOR THE DEPARTMENT
OF LANDS AND FOREST, SURVEY DIVISION BY KENNETH P MACDONALD,
DATED 15th OF NOVEMBER 1988, AS FIELD PLOT P-121/88.
See ALSO GRANT OF EASEMENT DATED JANUARY 20th 2015 AND GRANT
OF EASEMENT AMENDING AGREEMENT DATED FEBRUARY 9th 2016 IN
FAVOR OF AFFINITY WIND GP, INC.

FOR PERMIT

REVISIONS:

NO.	DATE	BY	DESCRIPTION
1	1/1/20	bc	



MEC ENGINEERING & CONSTRUCTION SERVICES LIMITED
958 PRINCE STREET, TRURO, NS B2N 1H8 902.893.3799

PROPOSED G&D CELL EXPANSION
Lands of
MUNICIPALITY OF THE COUNTY OF COLCHESTER
COLCHESTER BALEFILL & COMPOSTING FACILITY
PID: 20286902
MINGO ROAD, KEMPTOWN, COLCHESTER COUNTY, NOVA SCOTIA

DRAWN BY: C Lockhart
CHECKED BY: RJ Bezanson

DATE: 20 May 2020
SCALE: 1 : 500

JOB No. **200306** SHEET No. **200306-02**

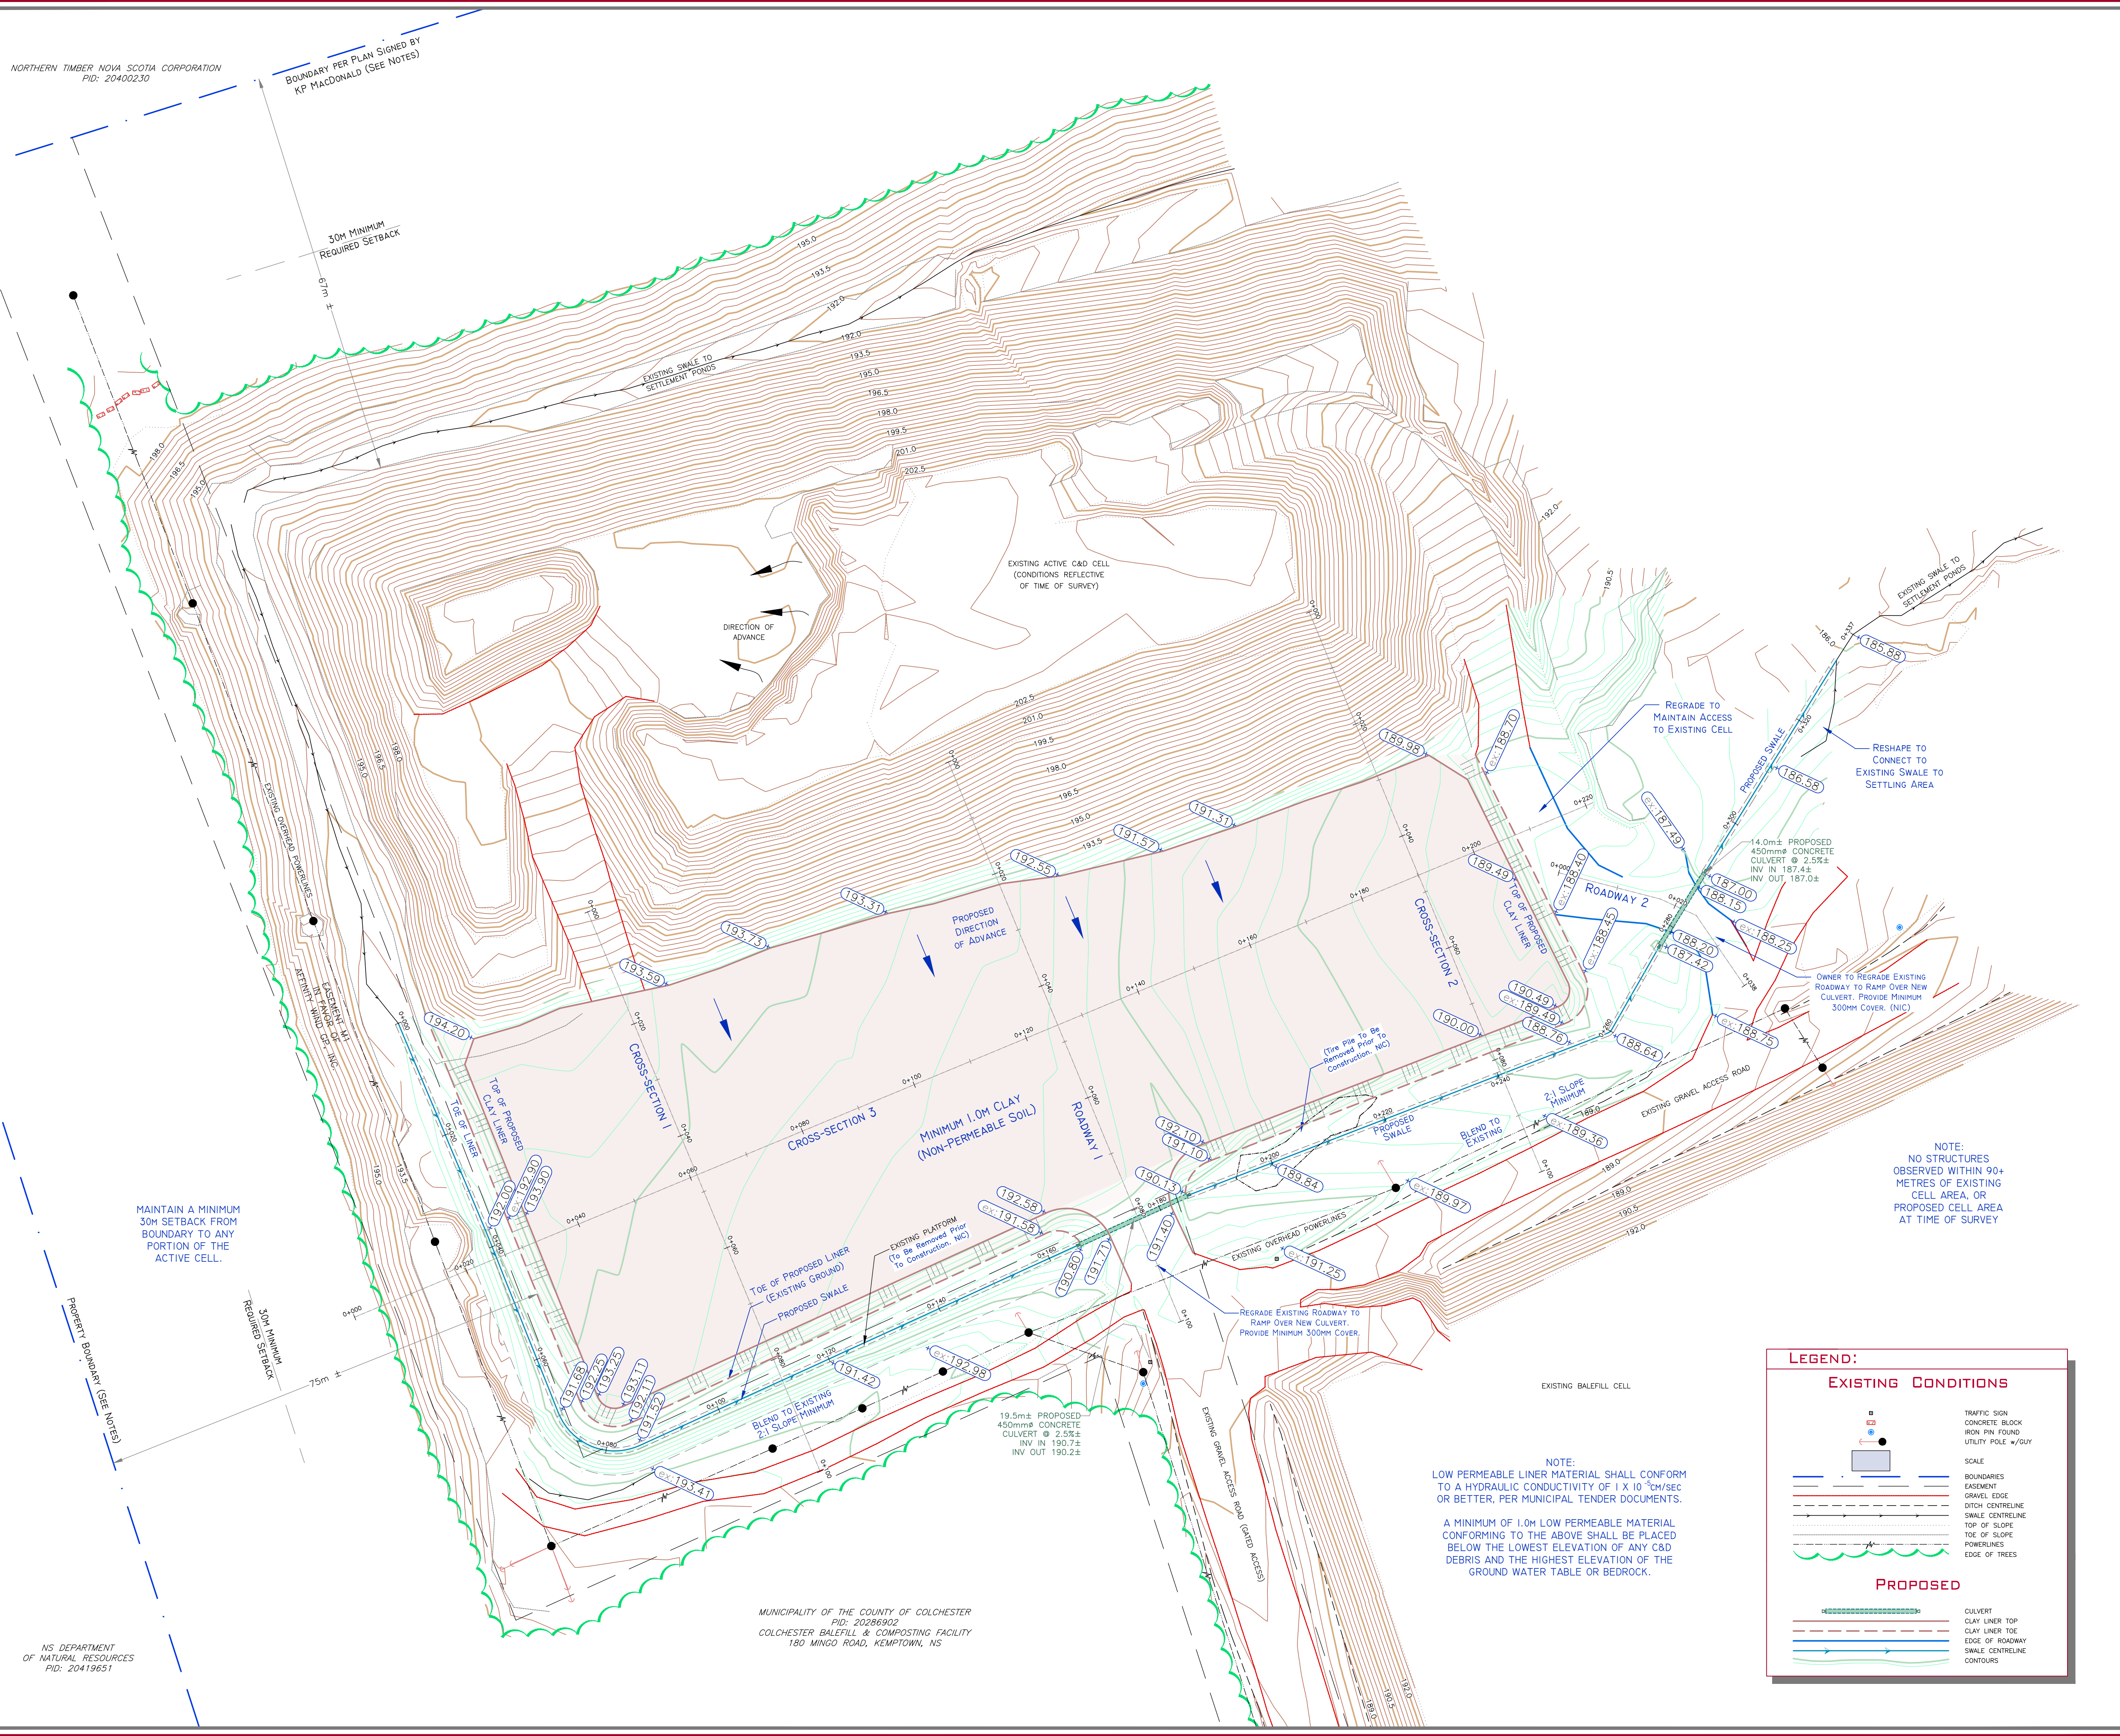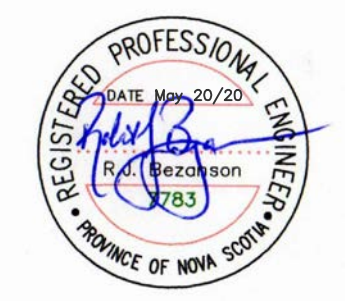

MAINTAIN A MINIMUM
30M SETBACK FROM
BOUNDARY TO ANY
PORTION OF THE
ACTIVE CELL.

PROPERTY BOUNDARY (SEE NOTES)






NS DEPARTMENT
OF NATURAL RESOURCES
PID: 20419651

MUNICIPALITY OF THE COUNTY OF COLCHESTER
PID: 20286902
COLCHESTER BALEFILL & COMPOSTING FACILITY
180 MINGO ROAD, KEMPTOWN, NS

NOTE:
LOW PERMEABLE LINER MATERIAL SHALL CONFORM TO
A HYDRAULIC CONDUCTIVITY OF 1×10^{-10} cm/sec
OR BETTER, PER MUNICIPAL TENDER DOCUMENTS.
A MINIMUM OF 1.0M LOW PERMEABLE MATERIAL
CONFORMING TO THE ABOVE SHALL BE PLACED
BELOW THE LOWEST ELEVATION OF ANY CAD
DEBRIS AND THE HIGHEST ELEVATION OF THE
GROUND WATER TABLE OR BEDROCK.

LEGEND:

EXISTING CONDITIONS	PROPOSED
TRAFFIC SIGN	CULVERT
CONCRETE BLOCK	CLAY LINER TOP
IRON PIN FOUND	CLAY LINER TOE
UTILITY POLE w/GUY	EDGE OF ROADWAY
SCALE	SWALE CENTRELINE
BOUNDARIES	CONTOURS
EASEMENT	
GRAVEL EDGE	
GRICH CENTRELINE	
SWALE CENTRELINE	
TOE OF SLOPE	
EDGE OF TRES	

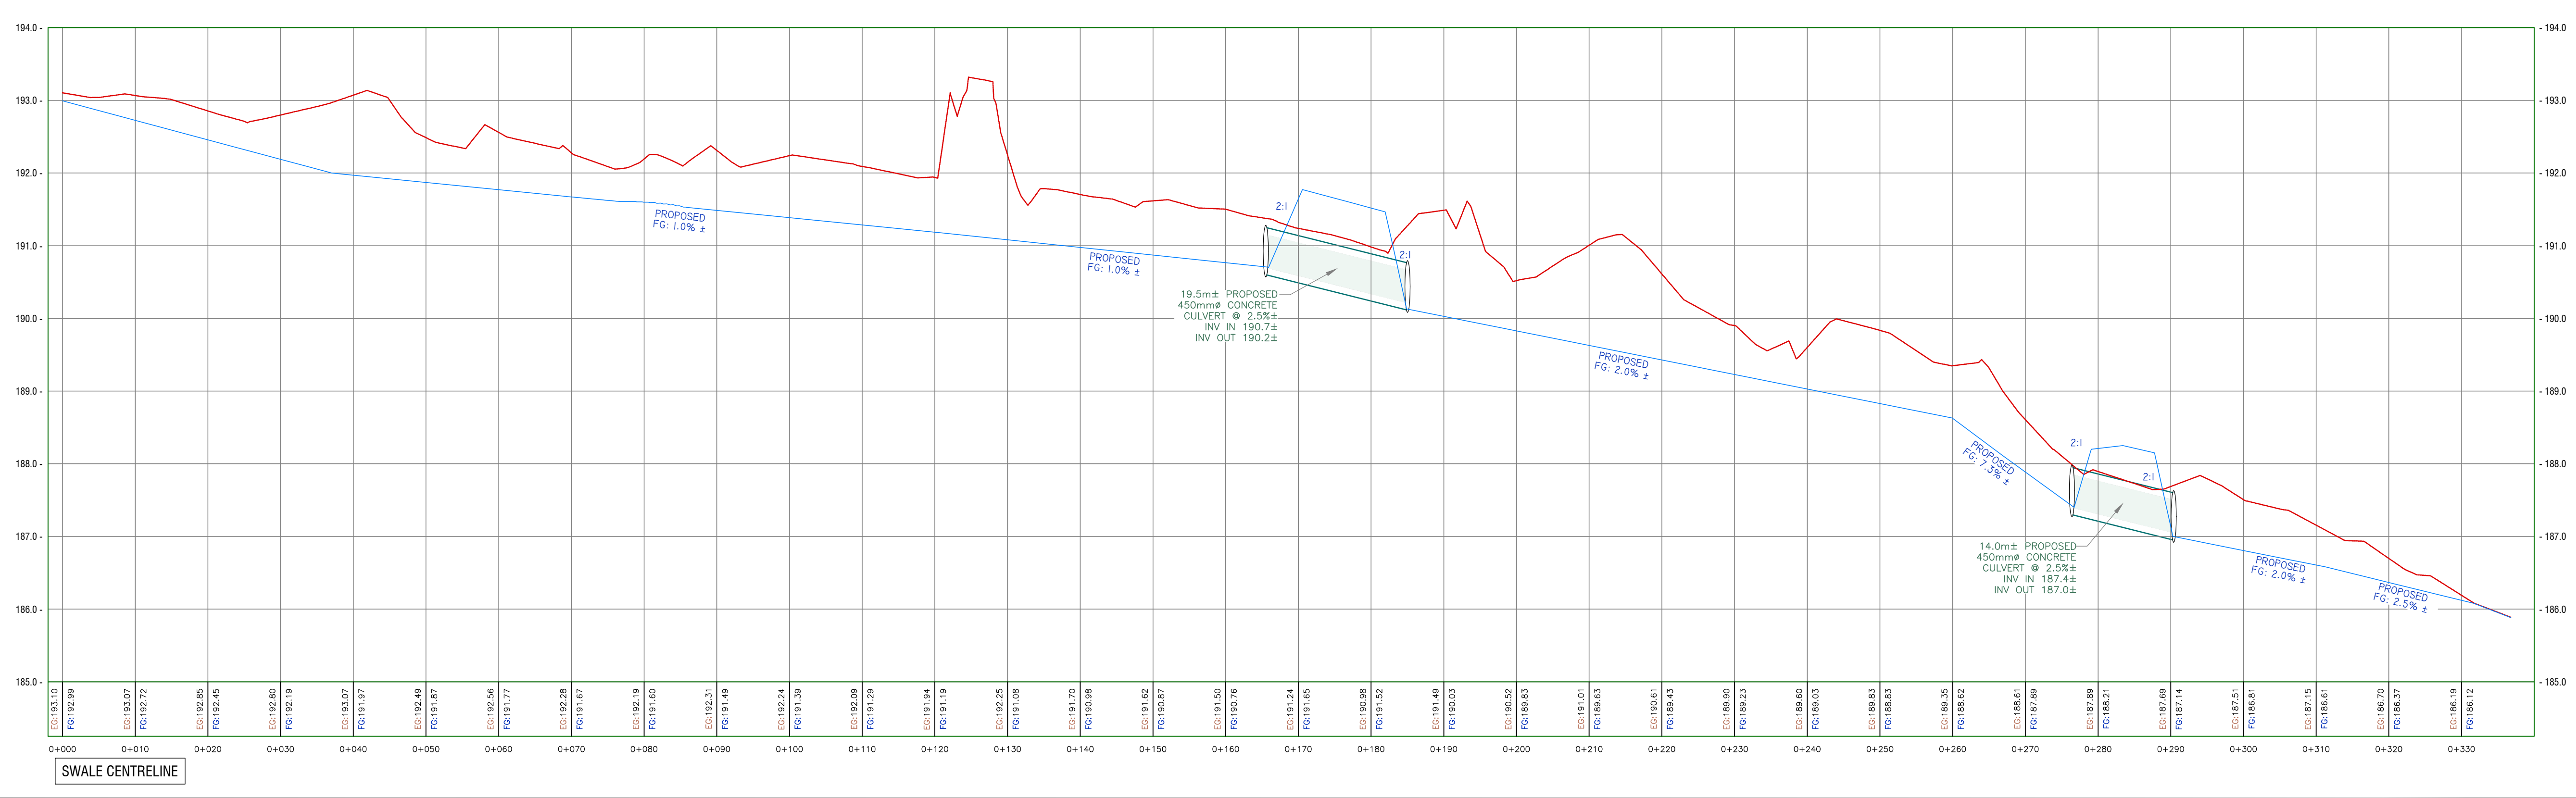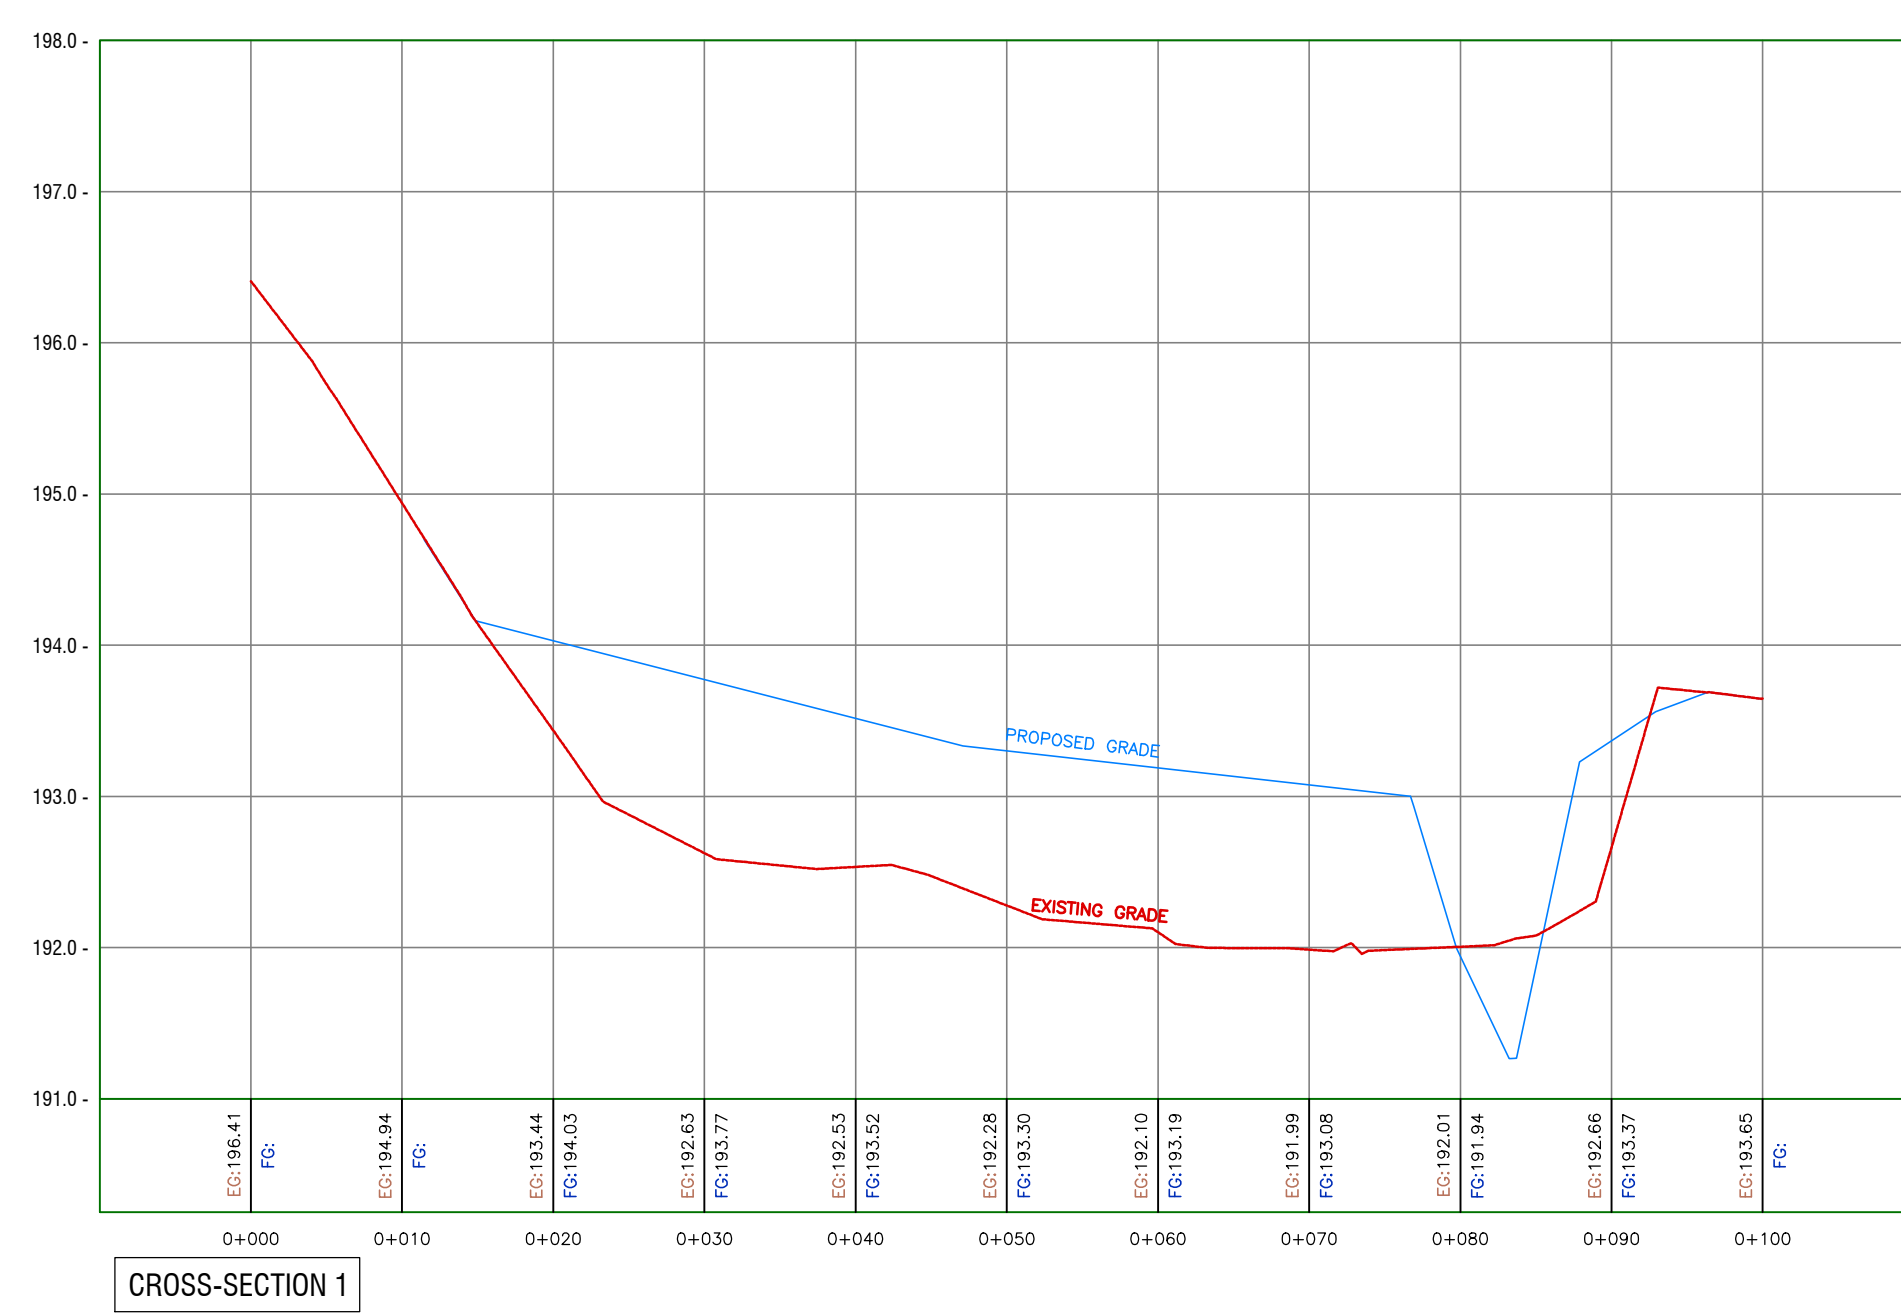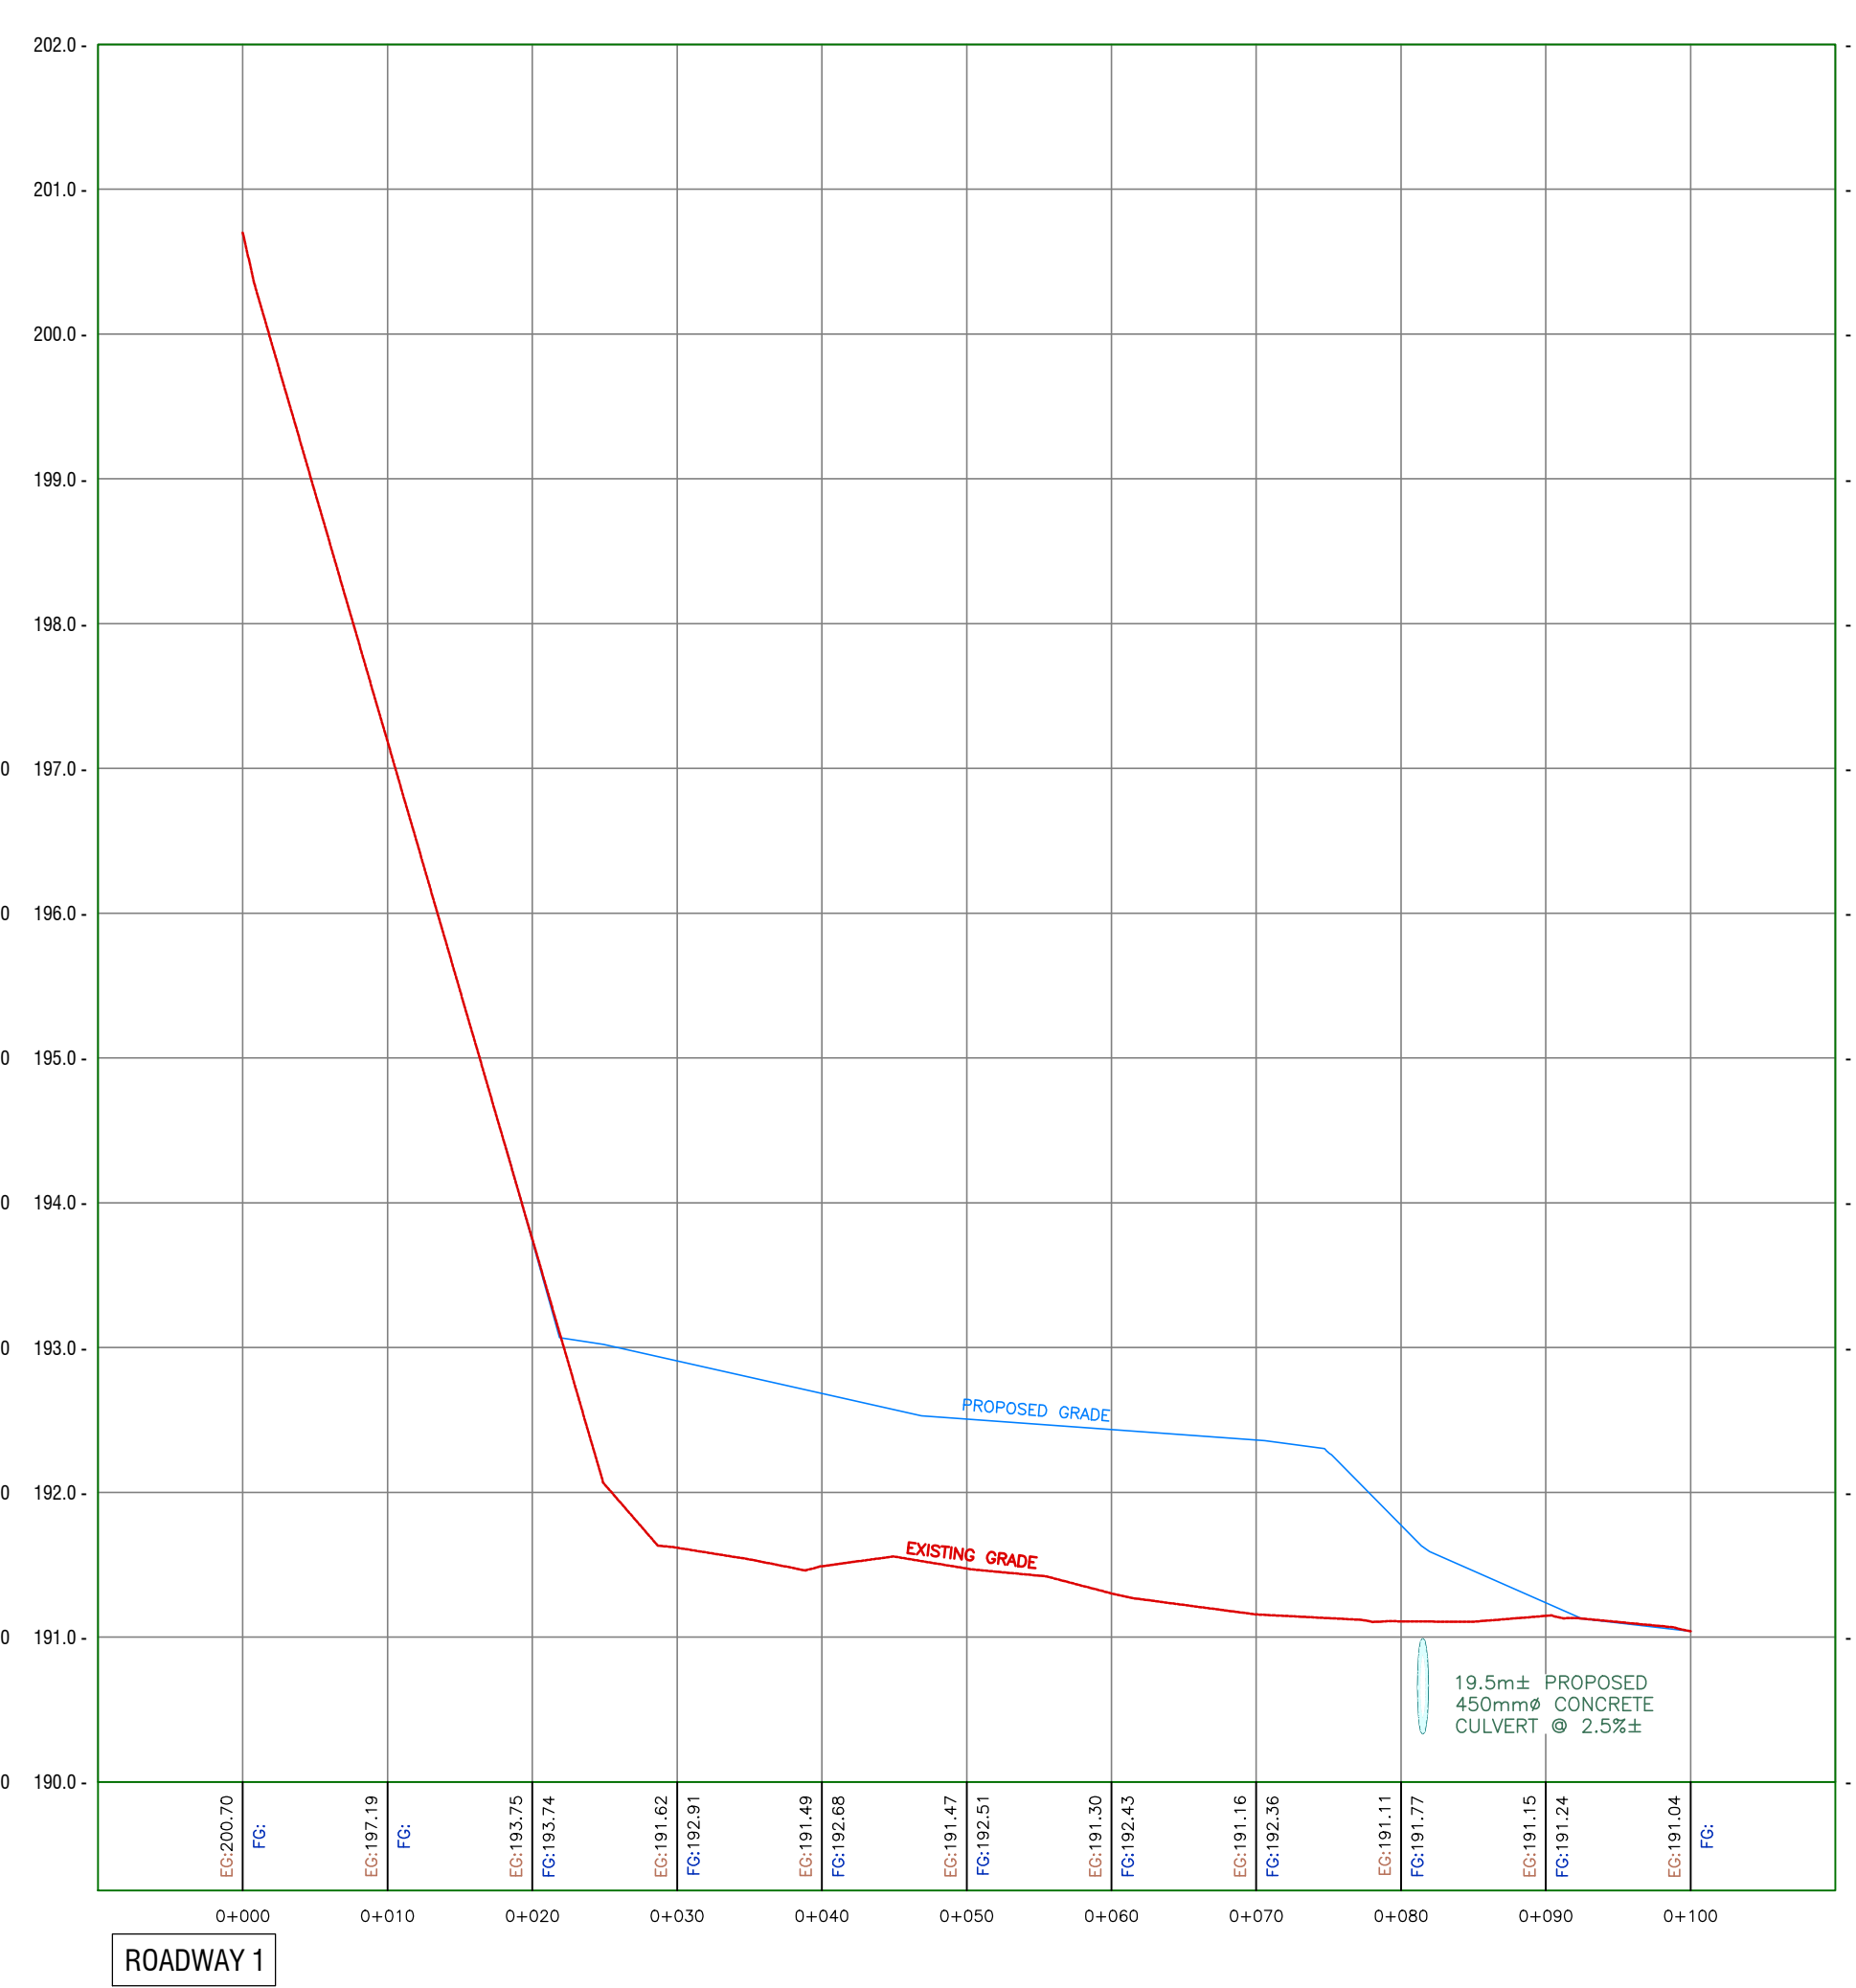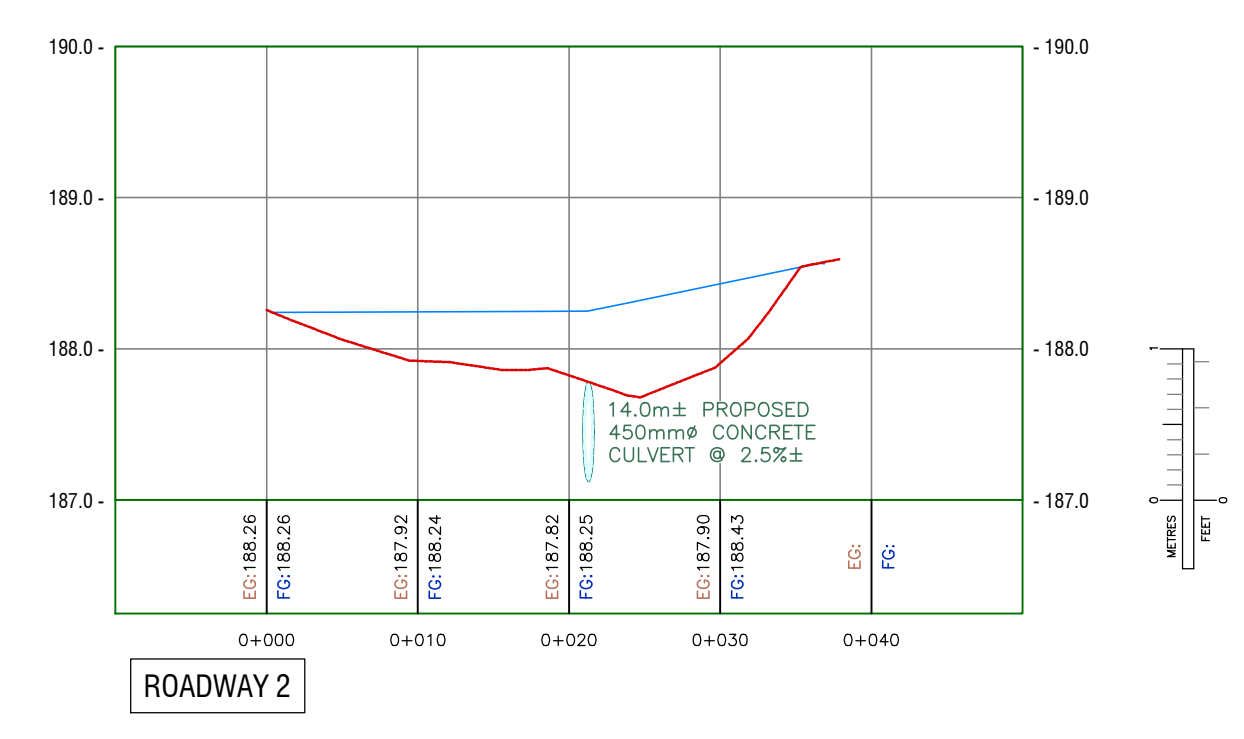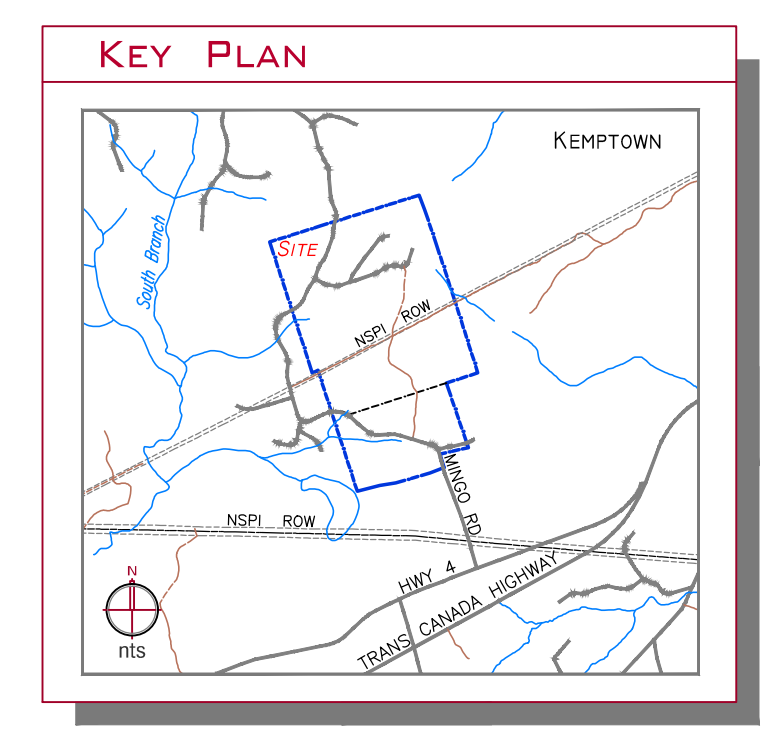

NOTES

FOR PERMIT

REVISIONS:

#	DATE	BY	DESCRIPTION
1	1/1/20	RC	

MEC ENGINEERING & CONSTRUCTION SERVICES LIMITED
 958 PRINCE STREET, TRURO, NS B2N 1H8 902.893.3799

PROJECT:
PROPOSED Cross-Sections 1
 Lands of
MUNICIPALITY OF THE COUNTY OF COLCHESTER
 COLCHESTER BALEFILL & COMPOSTING FACILITY
 PID: 20286902
 MINGO ROAD, KEMPTOWN, COLCHESTER COUNTY, NOVA SCOTIA




DRAWN BY:
 C Lockhart

CHECKED BY:
 RJ Bezanon

DATE:
 20 May 2020

SCALE:
 H = 1 : 500
 V = 1 : 50

JOB No. **200306** SHEET No. **200306-03**

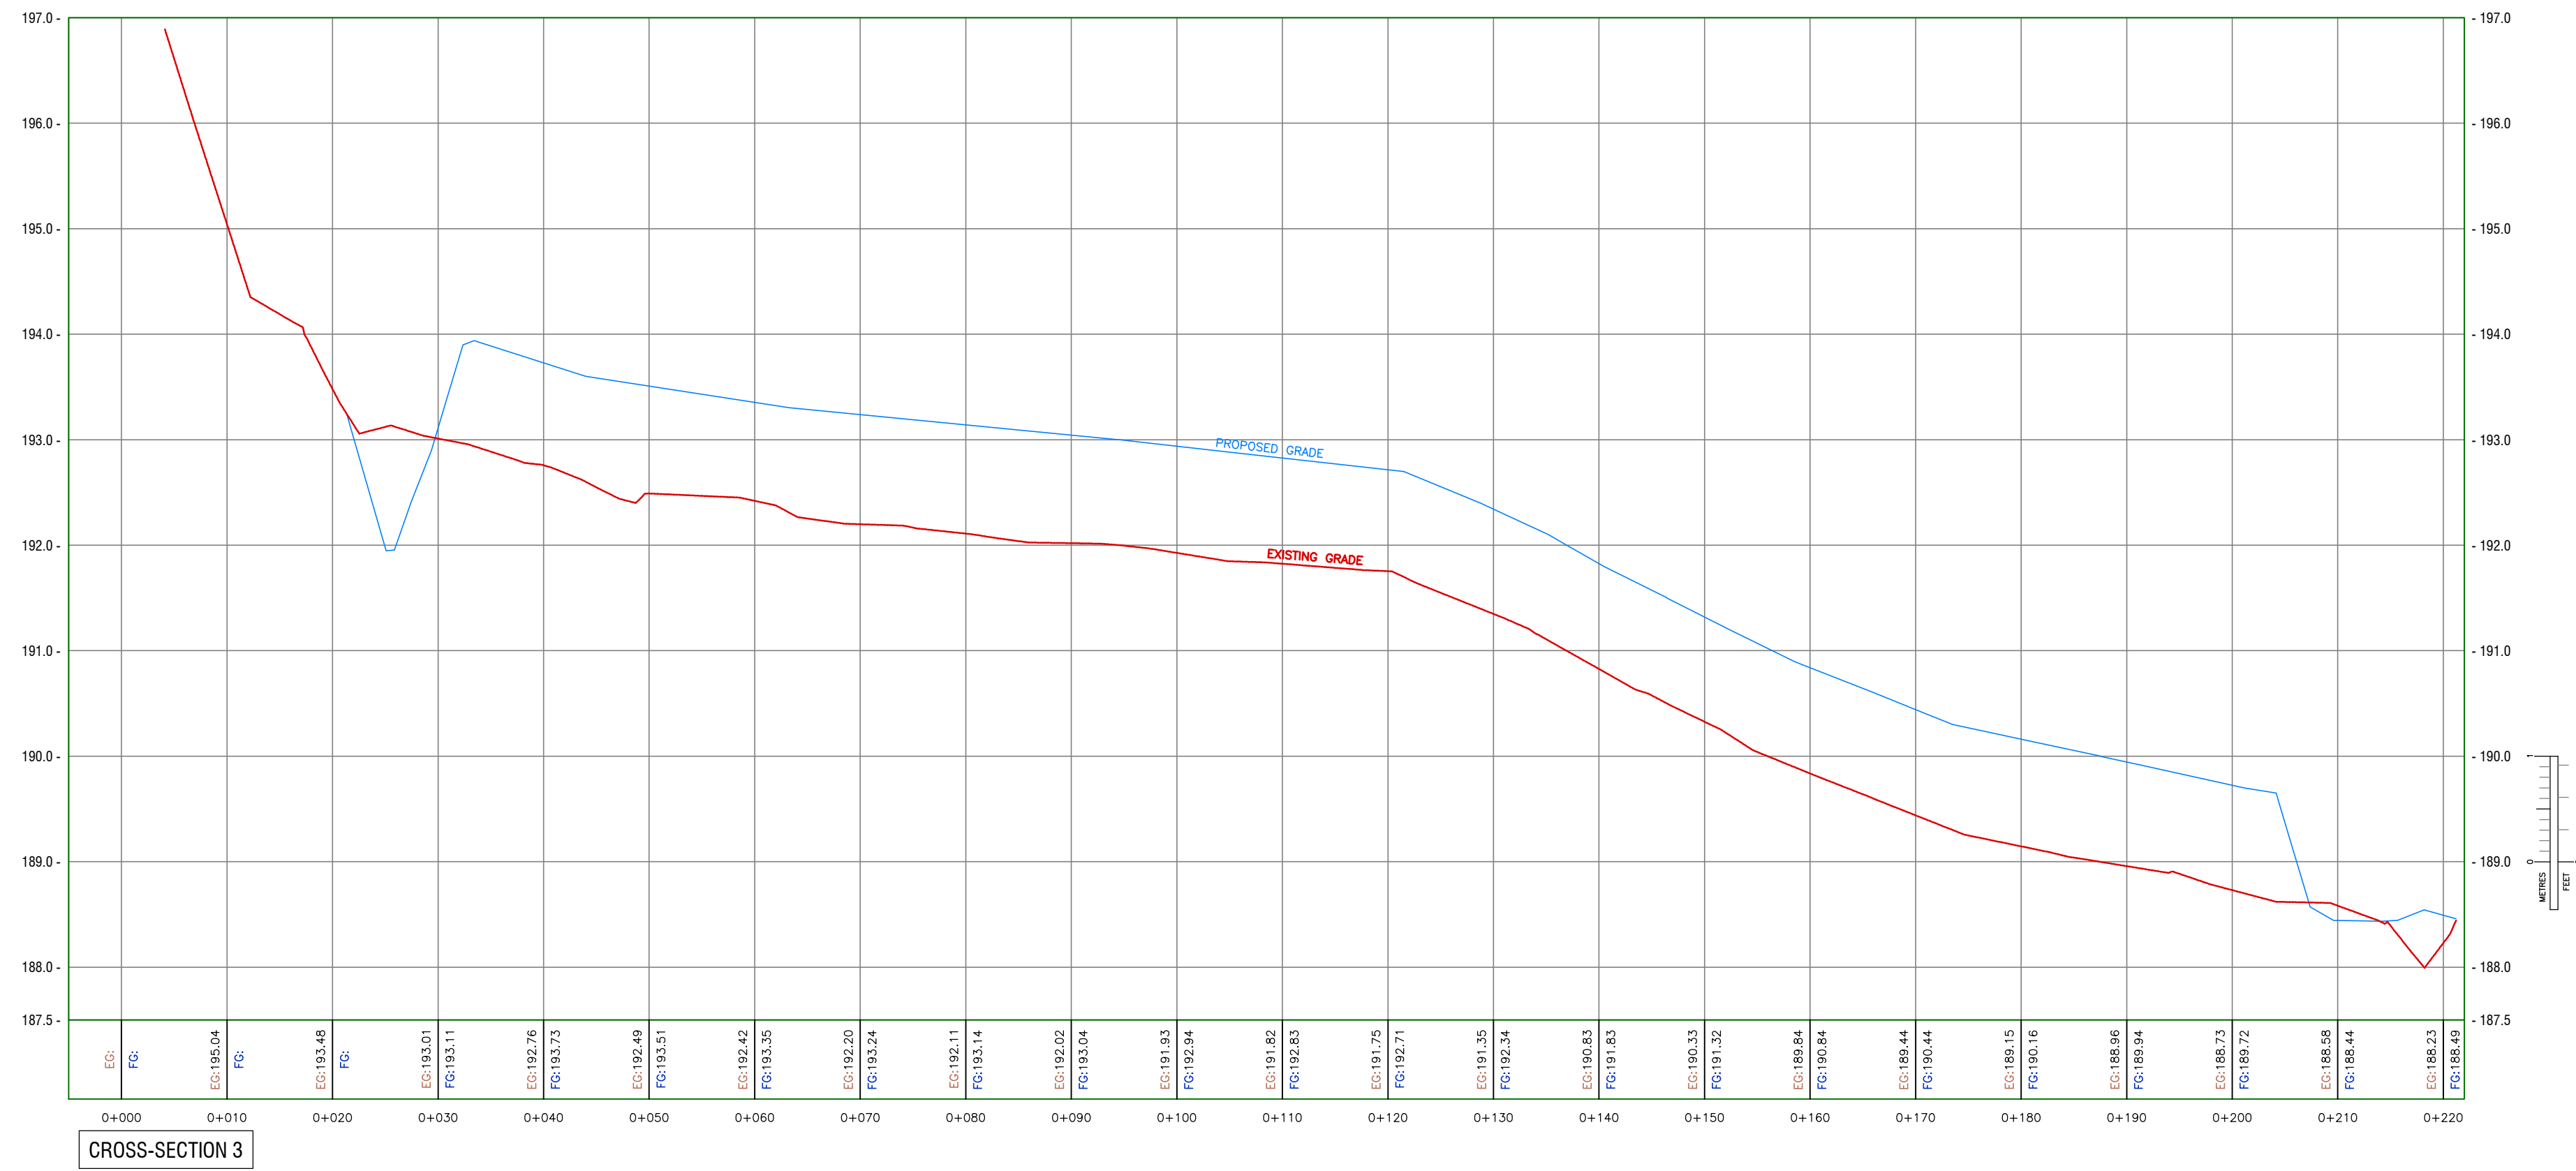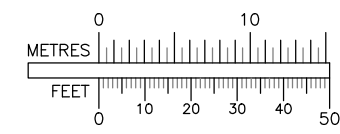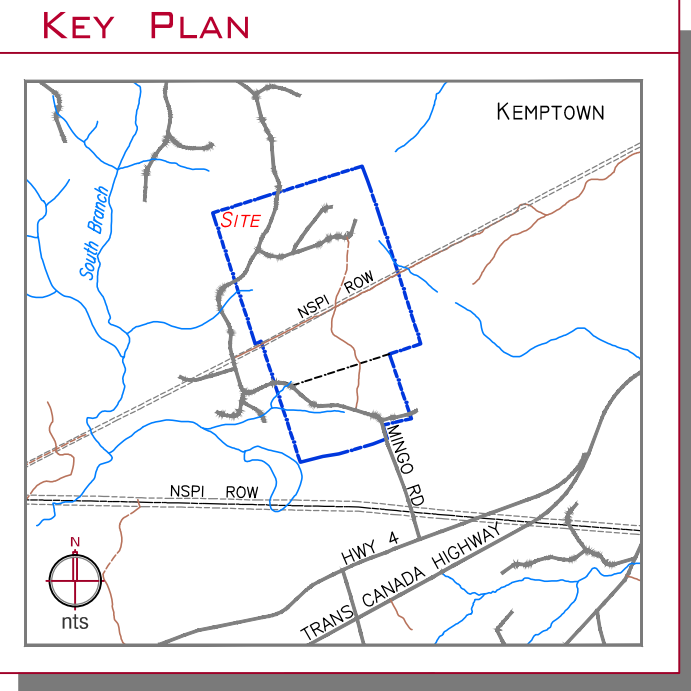


CROSS-SECTION 3

NOTES

FOR PERMIT

REVISIONS:

#- Y/N/D By-

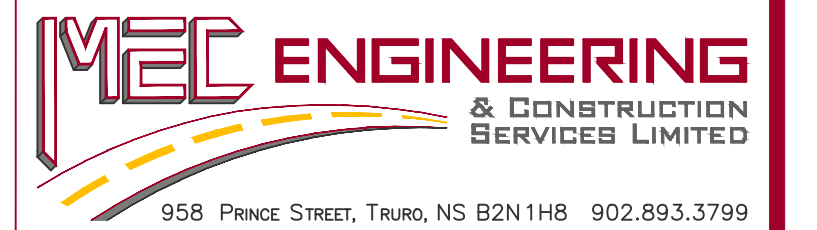

PROJECT:
PROPOSED CROSS-SECTIONS 2
 Lands of
MUNICIPALITY OF THE COUNTY OF COLCHESTER
 COLCHESTER BALEFILL & COMPOSTING FACILITY
 PID: 20286902
 MINGO ROAD, KEMPTOWN, COLCHESTER COUNTY, NOVA SCOTIA


DRAWN BY:
C Lockhart

CHECKED BY:
RJ Bezanson

DATE:
20 May 2020

SCALE:
H = 1 : 500
V = 1 : 50

JOB No.
200306

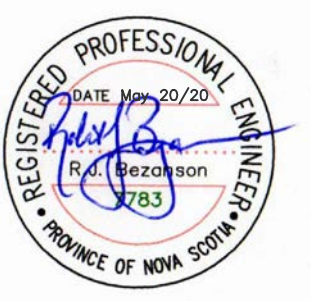

SHEET No.
200306-04

NOTES

ALL WORK TO CONFORM TO THE STANDARD SPECIFICATION FOR MUNICIPAL SERVICES, PROVINCE OF NOVA SCOTIA LATEST REVISION & REQUIREMENTS OF THE COUNTY OF COLCHESTER, NOVA SCOTIA.

THE WORK INCLUDES (BUT NOT LIMITED TO):
 CONTROL SURFACE DRAINAGE.
 PROVIDE HAY MULCH FOR TEMPORARY COVER DURING CONSTRUCTION ON EXPOSED AREAS OF SOILS PRIOR TO RAINFALL EVENTS.
 GEOTEXTILE, SILT FENCE & HAY BALES MUST BE AVAILABLE AT ALL TIMES FOR MAINTENANCE OF EROSION CONTROL ITEMS OR REMEDIAL WORK.
 ABSORBENT MATERIAL & SPILL CONTAINMENT KITS SHALL BE AVAILABLE AT ALL TIMES IN CASE OF A SPILL FROM CONSTRUCTION EQUIPMENT MALFUNCTION.


CONSTRUCTION RELATED TRAFFIC WILL REQUIRE CLEANING PRIOR TO LEAVING THE SITE SO THAT MATERIAL WILL NOT BE TRACKED ON TO ADJACENT PUBLIC STREETS.

CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION OF NATURAL WATERCOURSES FROM DAMAGE DUE TO SILTATION RUNOFF FROM THE CONSTRUCTION SITE. ACCEPTABLE CONSTRUCTION PROCEDURES MAY BE OBTAINED FROM "EROSION AND SEDIMENTATION CONTROL HANDBOOK FOR CONSTRUCTION SITES", CURRENT EDITION BY THE NOVA SCOTIA DEPARTMENT OF THE ENVIRONMENT.



CONSTRUCTION TO CONFORM TO REQUIREMENTS OF NOVA SCOTIA DEPARTMENT OF ENVIRONMENT "EROSION AND SEDIMENTATION CONTROL HANDBOOK" & "ENVIRONMENTAL CONSTRUCTION PRACTICES SPECIFICATION". SILT IN CONSTRUCTION EFFLUENT NOT TO EXCEED 25 ppm SUSPENDED SOLIDS.

CONFORM TO AS A MINIMUM SPECIFICATION:
 1. ENVIRONMENTAL CONSTRUCTION PRACTICE SPECIFICATIONS - PROVINCE OF NOVA SCOTIA.
 2. EROSION AND SEDIMENTATION CONTROL HANDBOOK - NOVA SCOTIA DEPARTMENT OF ENVIRONMENT.
 3. CONTROL SEDIMENT LADEN STORM WATER ON SITE. SEDIMENT IN SITE EFFLUENT NOT TO EXCEED 25 ppm.

LOW AREA OF SITE FOR STORM WATER COLLECTION DURING CONSTRUCTION. DISCHARGE BY NOVA SCOTIA DEPARTMENT OF ENVIRONMENT APPROVAL. SEDIMENT LOAD NOT TO EXCEED 25ppm SUSPENDED SOLIDS. RETAIN THIS AREA UNTIL ALL OTHER AREAS OF SITE ARE STABILIZED WITH ACCEPTABLE FINISHED SURFACE TREATMENTS WHICH WILL NOT PROVIDE SILT LADEN RUNOFF.

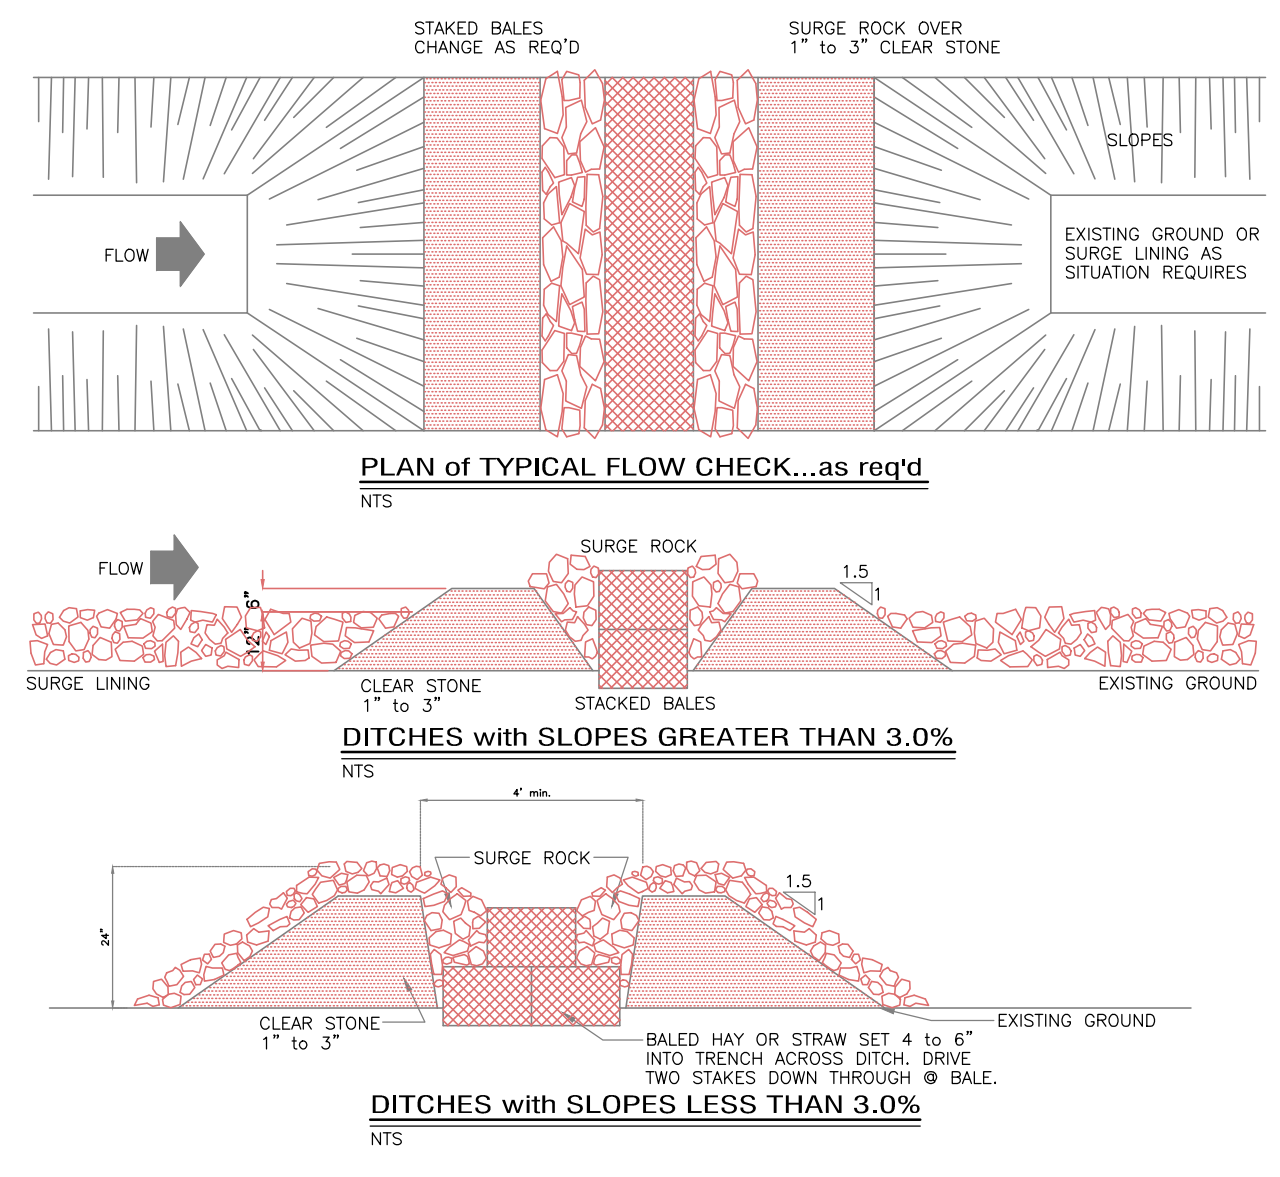

SWALE
c/w FLOW CHECKS
(Max Spacing: 15m
Where Slopes >3%)

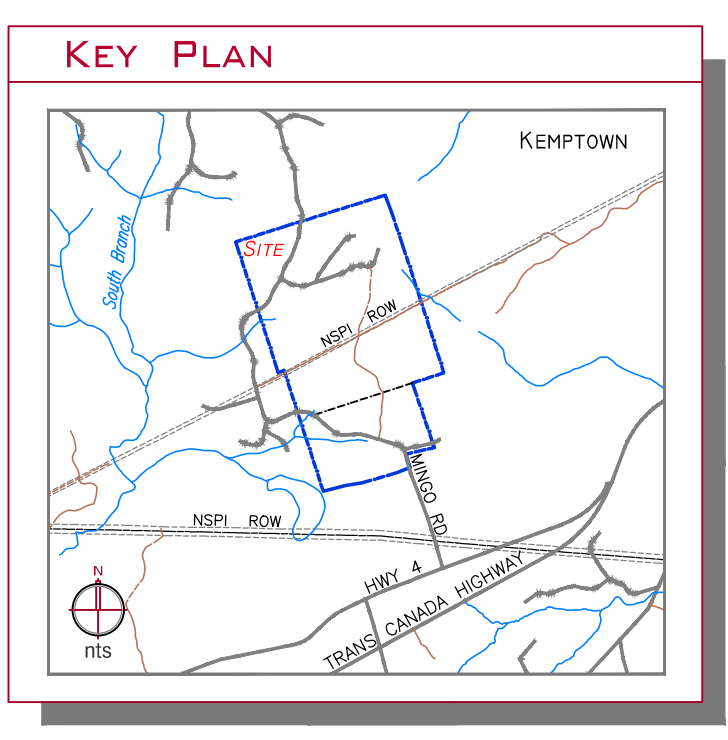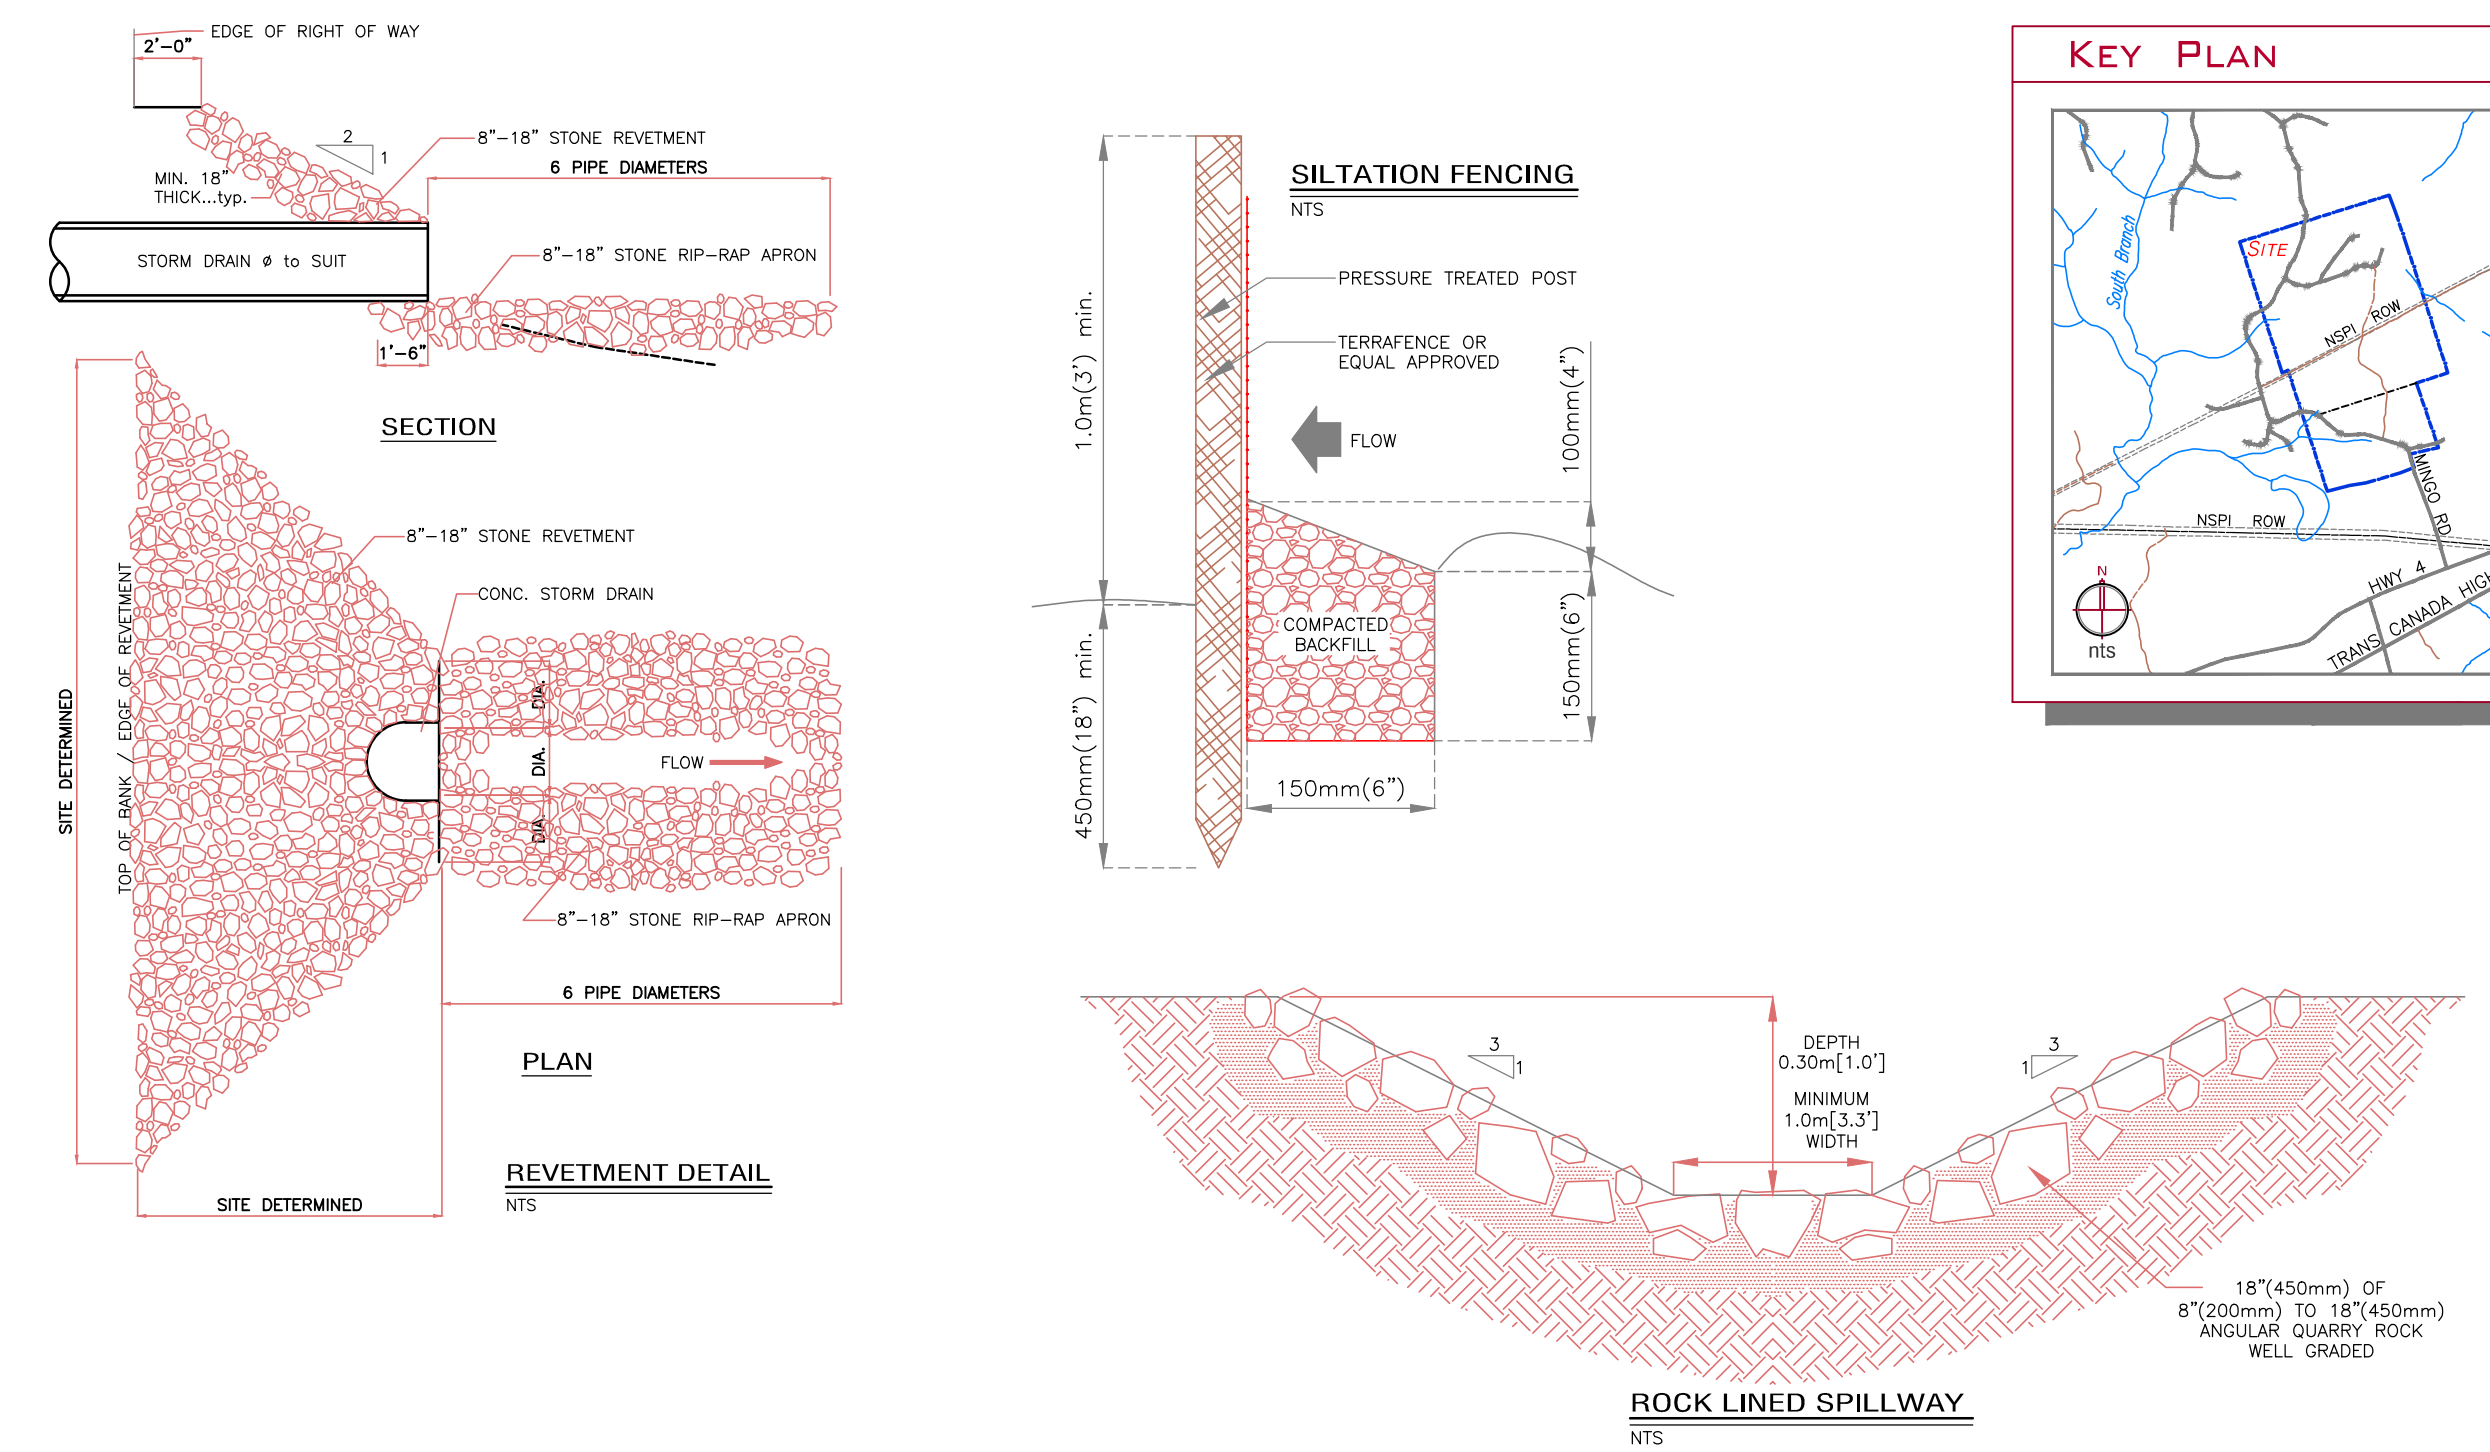

HAYMULCH ALL DISTURBED SURFACES, NOT TO BE STABILIZED BY ANY OTHER MEANS. SIDE SLOPES AND EXPOSED AREAS TO BE DRESSED AND STABILIZED BY OWNER WITH COMPOST AND HAYMULCH FOLLOWING CONSTRUCTION.

PROVIDE SILTFENCE ALONG EDGE OF EXCAVATION DURING CONSTRUCTION. TRACKED SEDIMENT FROM CONSTRUCTION TRAFFIC TO REMAIN WITHIN LIMITS OF WORK.

WHERE THERE IS A CONFLICT BETWEEN THESE GUIDELINES AND A STANDARD IDENTIFIED ELSEWHERE, THE MORE STRINGENT REQUIREMENT SHALL PREVAIL UNLESS AS OTHERWISE PROVIDED IN WRITING BY THE ENGINEER.



EROSION & SEDIMENT CONTROL NOTES

ACTUAL FIELD LOCATIONS OF SILT FENCES, HAYBALE BERMS, DITCH CHECKS ETC. MAY DIFFER FROM LOCATIONS SHOWN ON PLANS. PLAN LOCATIONS ARE SHOWN AS REPRESENTATIVE ONLY TO SHOW INTENT. SILT FENCES/HAYBALE BERMS SHOULD BE PLACED AND MAINTAINED AROUND PERIMETER OF CONSTRUCTION AREAS IN SUCH A MANNER AS TO OPTIMIZE FILTERING OF SILT-LADEN RUN-OFF. SILT FENCE OR OTHER APPROVED CONTROLS SHOULD BE PLACED AROUND ANY SOIL STOCKPILES AND SAID STOCKPILES ARE TO BE STABILIZED IMMEDIATELY.

THE CONTRACTOR MUST INSPECT ALL EROSION AND SEDIMENTATION CONTROLS FOR PROPER INSTALLATION AND OPERATIONAL CONDITION ON A DAILY BASIS DURING TIMES THE SITE IS ACTIVE. ANY DAMAGED OR INEFFECTIVE CONTROLS ARE TO BE IMMEDIATELY CORRECTED. ALL MEASURES MUST BE IN PLACE AND IN OPERATING CONDITION AT THE END OF EACH DAY.

THE CONTRACTOR SHALL MONITOR AND UPDATE THE EROSION AND SEDIMENT CONTROL PLAN AS CONSTRUCTION PROGRESSES AND SITE CONDITIONS CHANGE. ALL SEDIMENT CONTROL MEASURES ARE TO BE ADJUSTED TO MEET FIELD CONDITIONS AT THE TIME OF CONSTRUCTION AND ARE TO BE CONSTRUCTED PRIOR TO ANY GRADING OR DISTURBANCE OF EXISTING SURFACE MATERIALS. THESE MEASURES SHALL REMAIN IN PLACE AND MAINTAINED UNTIL FINAL STABILIZATION OF THE SITE.

PROVIDE TEMPORARY DRAINAGE AND PUMPING AS NECESSARY TO KEEP EXCAVATIONS AND SITE FREE FROM WATER. NO WATER CONTAINING SUSPENDED MATERIALS IS TO BE PUMPED OR OTHERWISE DISCHARGED INTO ANY WETLAND, WATERWAYS, SEWERS OR DRAINAGE SYSTEMS. RUNOFF WATER CONTAINING SUSPENDED MATERIALS IS TO BE CONTROLLED AND DIRECTED TO STORMWATER DETENTION OR SETTLING PONDS OR DISPOSED OF. IF IT IS REQUIRED TO DISCHARGE ACCUMULATED SITE WATER, IT SHALL BE DISCHARGED THROUGH A SEDIMENT BAG OR APPROVED ALTERNATE METHOD. THE RATE OF DISCHARGE SHALL BE CONTROLLED SUCH THAT THE DISCHARGE DOES NOT CONTRIBUTE TO EROSION.

EXISTING DRAINAGE DITCH TO BE DAMMED AT LOCATION SHOWN ON PLAN USING PLASTIC AND SANDBAGS OR OTHER APPROVED METHOD. WATER SHALL BE ACCUMULATED IN THE STORMWATER MANAGEMENT POND UNTIL PERMANENT RELOCATION OF SWALE IS COMPLETED.

DEPENDING ON NATURAL ELEMENTS AND CONSTRUCTION METHODS, THE ENGINEER MAY REQUIRE ADDITIONAL AND OR MODIFIED CONTROL MEASURES TO BE PUT IN PLACE TO PROTECT NATURAL WATERCOURSES AND STORM INFRASTRUCTURE FROM DAMAGE DUE TO SILT LADEN RUN-OFF.

DURING TIMES THAT THE SITE IS IDLE, THE CONTRACTOR SHALL PROVIDE FOR REGULAR ROUTINE MONITORING OF EROSION AND SEDIMENT CONTROLS AND CONTINUE TO MAINTAIN OR UPGRADE SUCH MEASURES AS CONDITIONS REQUIRE SUCH AS IN ADVANCE OF FORECASTED RAINFALL EVENTS. RESOURCES MUST ALWAYS BE AVAILABLE, EVEN IF CONSTRUCTION ACTIVITIES NEED TO BE TEMPORARILY SUSPENDED UNTIL THE SEDIMENT CONTROL MEASURES CAN BE UPGRADED OR REPAIRED AS NECESSARY.

THE CONTRACTOR SHALL BE AWARE THAT DURING TIMES WHERE GROUND CONDITIONS ARE SATURATED OR AS FROST IS THAWING THAT THE ACCESS ROAD MAY BE IMPASSIBLE TO HEAVY EQUIPMENT WITHOUT RISK OF CAUSING SIGNIFICANT DAMAGE TO THE ROADWAY AND INCREASED POTENTIAL FOR SILT LADEN RUN-OFF. EXTRA VIGILANCE WILL BE REQUIRED DURING THESE TIMES TO MAINTAIN THE EROSION AND SEDIMENT CONTROLS. IT MAY BE REQUIRED TO TEMPORARILY SUSPEND CONSTRUCTION REQUIRING A CONTINGENCY PLAN TO TEMPORARILY HOUSE MATERIALS UNTIL CONDITIONS PERMIT CONSTRUCTION TO RESUME.

NOTES

FOR PERMIT

REVISIONS:

REV#	DATE	BY	DESCRIPTION
1	1/11/20	bc	-



SITE DETAILS
EROSION & SEDIMENT CONTROL
 Lands of
MUNICIPALITY OF THE COUNTY OF COLCHESTER
 COLCHESTER BALEFILL & COMPOSTING FACILITY
 PID: 20286902
 MINGO ROAD, KEMPTOWN, COLCHESTER COUNTY, NOVA SCOTIA

DRAWN BY:	C Lockhart		
CHECKED BY:	RJ Bezzanson		
DATE:	20 May 2020		
SCALE:	1 : 500		
JOB No.	200306	SHEET No.	200306-05